

Standards

- Designed to meet BS1726, class B.
- Springs powder coated.

Description

- Open Spring Mount are used to isolate both noise and vibration from floor mounting equipments.
- Pumps, packaged air handling units, air conditioning units, centrifugal and axial fans, inertia bases etc.
- Outer diameter equal to at least 85% of working height.
- Neoprene top and bottom with non-skid bolt down base.
- Springs designed for 50% overload capacity.
- Plated levelling / lock bolt.

Technical Data


Item Code	Art. No.	Color Code	L	G	B	K	R	Deflection	Max. Load
			mm	mm	mm	mm	mm	mm	N
SP OSM25/10	44010	White	110	90	65	115	M10	25	100
SP OSM25/15	44015	Yellow	110	90	65	115	M10	25	150
SP OSM25/20	44020	Purple	110	90	65	115	M10	25	200
SP OSM25/30	44030	Purple	110	90	65	115	M10	25	300
SP OSM25/40	44040	Yellow	110	90	65	115	M10	25	400
SP OSM25/60	44060	Grey	110	90	75	125	M10	25	600
SP OSM25/100	440100	Green	110	90	75	125	M10	25	1000
SP OSM25/160	440160	Light Blue	110	90	75	125	M10	25	1600
SP OSM25/200	440200	Green	110	90	75	125	M10	25	2000
SP OSM25/250	440250	Green	110	90	75	125	M10	25	2500
SP OSM25/300	440300	Orange	140	120	100	168	M12	25	3000
SP OSM25/400	440400	Red	140	120	100	168	M12	25	4000
SP OSM25/500	440500	Purple	140	120	100	168	M12	25	5000
SP OSM25/600	440600	Grey	140	120	100	168	M12	25	6000
SP OSM25/800	440800	Orange	140	120	100	168	M12	25	8000
SP OSM25/1050	4401050	Brown	140	120	100	168	M12	25	10500
SP OSM25/1250	4401250	Black	140	120	100	168	M12	25	12500

Note :

Due to policy of continual improvement, the specifications are subject to change without prior notice.

Measurement are subject to 5% tolerance.

To achieve good sound suppressions do not over load fitting.

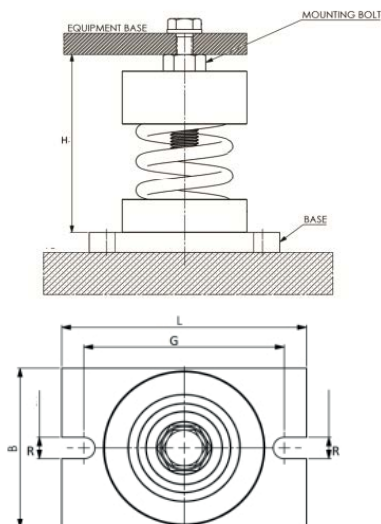

Standards

- Designed to meet BS1726, class B.
- Springs powder coated.

Description

- Open Spring Mount are used to isolate both noise and vibration from floor mounting equipments.
- Pumps, packaged air handling units, air conditioning units, centrifugal and axial fans, inertia bases etc.
- Outer diameter equal to at least 85% of working height.
- Neoprene top and bottom with non-skid bolt down base.
- Springs designed for 50% overload capacity.
- Plated levelling / lock bolt.

Technical Data

Item Code	Art. No.	Color Code	L	G	B	K	R	Deflection	Max. Load
			mm	mm	mm	mm	mm	mm	N
SP OSM50/10	48010	White	110	90	65	135	M10	50	100
SP OSM50/15	48015	Yellow	110	90	65	135	M10	50	150
SP OSM50/20	48020	Purple	110	90	65	135	M10	50	200
SP OSM50/30	48030	Purple	110	90	65	135	M10	50	300
SP OSM50/40	48040	Yellow	110	90	65	135	M10	50	400
SP OSM50/60	48060	Grey	110	90	75	150	M10	50	600
SP OSM50/100	480100	Green	110	90	75	150	M10	50	1000
SP OSM50/160	480160	Light Blue	110	90	75	155	M10	50	1600
SP OSM50/200	480200	Green	110	90	75	150	M10	50	2000
SP OSM50/250	480250	Green	110	90	75	155	M10	50	2500
SP OSM50/300	480300	Orange	140	120	100	208	M12	50	3000
SP OSM50/400	480400	Red	140	120	100	208	M12	50	4000
SP OSM50/500	480500	Purple	140	120	100	208	M12	50	5000
SP OSM50/600	480600	Grey	140	120	100	213	M12	50	6000
SP OSM50/800	480800	Orange	140	120	100	213	M12	50	8000
SP OSM50/1050	4801050	Brown	140	120	100	213	M12	50	10500
SP OSM50/1250	4801250	Black	140	120	100	213	M12	50	12500

Note :

Due to policy of continual improvement, the specifications are subject to change without prior notice.

Measurement are subject to 5% tolerance.

To achieve good sound suppressions do not over load fitting.