


Pipe Installation System

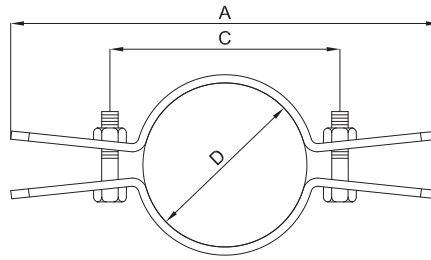

Applications

- Riser Clamps are designed to act as a rigid support or guide for vertical pipes.
- Suitable for use with all types of pipes

Advantages

- Used for support of vertical piping by friction, no welding required on pipe.

Properties

Material
Steel

Standards

Electro galvanized as per ASTM B 633.

Galvanized as per ASTM A 123/ A 123M.

Designed to meet MSS Standard SP-58-2002, type 8 and SP-69.

Finish

Electro Zinc Plated GI /
Hot dip galvanized HDG /
Stainless Steel A4

Technical Data

Item	Art number for GI	Pipe Size (mm)	Pipe Size (inch)	Pipe Outer Dia. D (mm)	Length A (mm)	Length C (mm)	Hole size (mm)	Max. Load (N)
SRC 1/2"	3200022	DN15	1/2"	21.3	216	59	11	4000
SRC 3/4"	3200028	DN20	3/4"	26.7	227	68	11	4000
SRC 1"	3200035	DN25	1"	33.4	227	71	11	4000
SRC 1 1/4"	3200040	DN32	1 1/4"	42.1	240	83	11	4000
SRC 1 1/2"	3200048	DN40	1 1/2"	48.2	251	96	11	4000
SRC 2"	3200060	DN50	2"	60.3	260	106	11	4000
SRC 2 1/2"	3200075	DN65	2 1/2"	73.0	280	124	11	6500
SRC 3"	3200090	DN80	3"	88.9	298	140	11	6500
SRC 4"	3200115	DN100	4"	114.3	321	165	13	8000
SRC 5"	3200140	DN125	5"	141.3	330	168	13	8000
SRC 6"	3200168	DN150	6"	168.3	368	210	13	11000
SRC 8"	3200219	DN200	8"	219.1	406	244	17	11000
SRC 10"	3200273	DN250	10"	273.1	464	464	17	15000
SRC 12"	3200323	DN300	12"	323.8	524	371	17	15000
SRC 14"	3200373	DN350	14"	355.6	581	435	17	17500
SRC 16"	3200406	DN400	16"	406.4	622	464	17	17500
SRC 18"	3200457	DN450	18"	457.2	686	533	21	17500
SRC 20"	3200508	DN500	20"	508.0	508	600	21	22000
SRC 24"	3200610	DN600	24"	609.6	850	700	21	27000

Note:

Hot Dip Galvanized & Stainless Steel Finishes are available upon request