

## Pipe Installations Clamps




## Applications

- For use in fire fighting and sprinkler installations
- Design permits vertical adjustment of pipe after installation

## Advantages

- Easy to install, without tools
- High load capacity due to one piece design
- The sprinkler loop with clearance hole for easy fixing with threaded rod and nut

## Technical Data

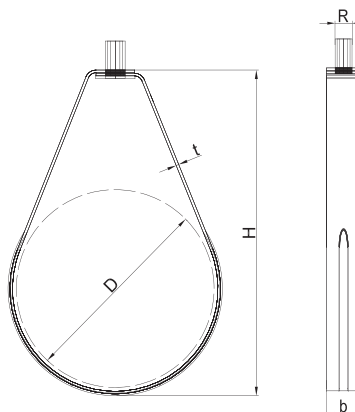

## Properties

**Material**  
Steel

### Standards

Pregalvanized as per ASTM A 653 G90  
Designed to meet MSS Standard SP-58, type 10 and SP-69

### Finish

Electro Zinc Plated GI /  
Hot dip galvanized HDG /  
Stainless Steel A4

### Sprinkler Clamp

Item	Art number for GI	Pipe diameter D		Height H (mm)	Width b (mm)	Rod size R	Thickness t (mm)	Max. Load (N)
		(inch)	(mm)					
SSC ½	3140022	½	22.0	54	20	M10	1.5	3000
SSC ¾	3140028	¾	28.0	60	20	M10	1.5	3000
SSC 1	3140035	1	35.0	69	20	M10	1.5	3000
SSC 1¼	3140040	1¼	42.0	78	20	M10	1.5	3000
SSC 1½	3140048	1½	48.0	85	20	M10	1.5	3000
SSC 2	3140060	2	60.0	102	20	M10	1.5	3000
SSC 2½	3140075	2½	73	118	32	M10	2.0	4500
SSC 3	3140090	3	89.0	144	32	M10	2.0	4500
SSC 4	3140115	4	115	178	32	M10	2.5	5500
SSC 5	3140140	5	140.0	220	40	M12	2.5	6500
SSC 6	3140168	6	168	262	40	M12	3.0	7500
SSC 8	3140219	8	219.0	305	50	M12	3.0	9000
SSC 10	3140273	10	273.0	350	50	M12	3.0	9000

### Note:

Hot Dip Galvanized & Stainless Steel Finishes are available upon request