


Pipe Installations Clamps

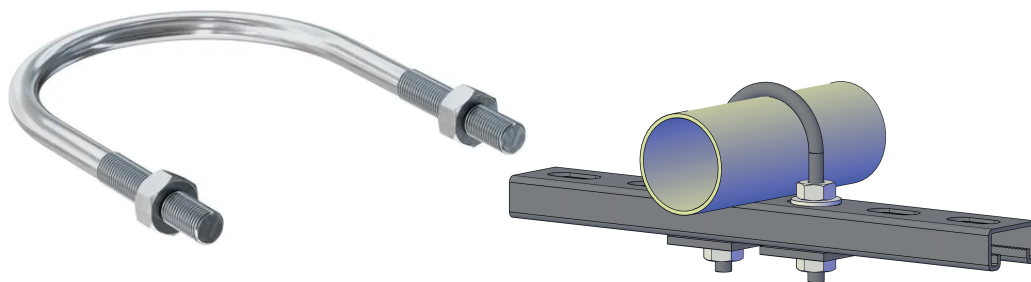

Properties


Material
Steel
Property Class
S275JR
Finish
Electro Galvanized /
Hot dip galvanized /
Stainless Steel A4

Features

- Electrogalvanized as per ASTM B 633 Standards
- Designed to meet MSS Standard SP-58, Type 24 and SP-69

Advantages

- U Profiles for easy horizontal and vertical pipe installations
- U Bolt's two screws allow for ideal adaptation to suit the outer pipe diameter
- U Bolt with Channel support acts as a guide support
- U Bolt with Rubber Insert support can be used for Chilled water pipes installation

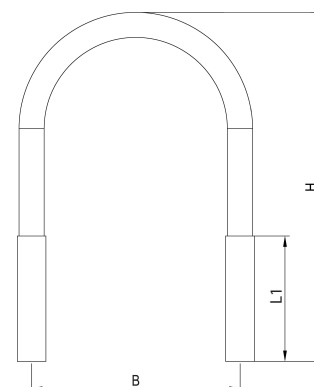

Technical Data

Electro Zinc Plated U Bolt

Item	Art number for GI	Pipe Outer Dia. (mm)	Pipe Size (inch)	Thread Size M	Width B (mm)	Length H (mm)	Length L1 (mm)
SUB 22 MM	211102210	22	1/2"	M 10	32	65	50
SUB 28 MM	211102810	28	3/4"	M 10	38	77	50
SUB 35 MM	211103510	35	1"	M 10	45	85	50
SUB 42 MM	211104210	42	1 1/4"	M 10	53	93	50
SUB 48 MM	211104810	48	1 1/2"	M 10	60	100	50
SUB 60 MM	211106010	60	2"	M 10	71	110	50
SUB 75 MM	211107512	75	2 1/2"	M 12	90	127	50
SUB 90 MM	211109012	90	3"	M 12	104	140	50
SUB 115 MM	211111512	115	4"	M 12	128	165	50
SUB 140 MM	211114012	140	5"	M 12	154	190	50
SUB 168 MM	211116812	168	6"	M 12	182	220	50
SUB 219 MM	211121916	219	8"	M 16	238	295	75
SUB 273 MM	211127320	273	10"	M 20	295	370	100
SUB 324 MM	211132420	324	12"	M 20	346	420	100
SUB 356 MM	211135620	356	14"	M 20	378	455	100
SUB 406 MM	211140620	406	16"	M 20	428	505	100
SUB 457 MM	211145724	457	18"	M 24	483	555	100
SUB 508 MM	211150824	508	20"	M 24	534	605	100
SUB 610 MM	211161024	610	24"	M 24	636	710	100

Note:

Hot Dip Galvanized & Stainless Steel Finishes are available upon request

Sizes of U bolts can be modified to be used with rubber insert supports.

Alternate rod sizes for different pipe sizes available upon request.

Selection is prepared for standard steel pipe sizes only, U bolts sizes can be selected for different pipe sizes upon request.